

STIRRER



Mini Magnetic Stirrer



Strong magnetic field



Large mixing ability



Durable brushless motor



LCD display

TECHNICAL DATA

Model	MS3	MS5	MS5S
LCD Display	No	No	Yes
Control	Knob	Knob	Knob
Motor Type	Brushless motor		
Working Plate Size (mm)	125	135	135
Speed Range	200-1800rpm	350-1800rpm	200-2000rpm
Max Stirring Volume	1L(H ₂ O)	2L(H ₂ O)	2L(H ₂ O)
Stir Bar Size (mm)	30	30	30
Power	3W	5W	5W
Shell Protection Level	IP42		
Voltage	100-240V 50/60Hz		

Heating Magnetic Stirrer



Strong magnetic field



Stainless steel ceramic
coated countertops

TECHNICAL DATA

Model	HS-5
Control Mode	Brushless motor
Max Stirring Volume	2L(H ₂ O)
RPM	200-1500rpm
Timing Range	/
Control Mode	Knob
Working Plate (mm)	Φ135
Plate Temp.	260°C
Allowable Ambient Temp	5~40°C 80%RH
Power	200W
Product Size (mm)	225*155*90

Digital Display Hotplate Stirrer



Strong magnetic field



Stainless steel ceramic
coated countertops

TECHNICAL DATA

Model	HS-5C	HS-5Pro
Control Mode	Brushless motor	Brushless motor
Max Stirring Volume	2L(H ₂ O)	2L(H ₂ O)
RPM	200-1500rpm	50-1500rpm
Timing Range	/	1min-12h
Control Mode	Digital display & Knob	Digital display & Button
Working Plate (mm)	Φ135	Φ135
Plate Temp.	280°C	310°C
Liquid/Plate Temp Accuracy	±1°C/±3°C	±1°C/±3°C
Power	300W	400W
Product Size (mm)	225*155*90	225*155*90

Digital Display Hotplate Stirrer



Strong magnetic field



Stainless steel ceramic coated countertops

TECHNICAL DATA

Model	HS-8Pro
Control Mode	Brushless motor
Max Stirring Volume	5L(H ₂ O)
RPM	50-1500rpm
Timing Range	1min - 12h
Control Mode	Digital display & Knob & Button
Working Plate (mm)	Square Plate160*160mm
Plate Temp.	310°C
Allowable Ambient Temp	5~40°C 80%RH
Power	500W
Product Size (mm)	285*180*90

Large Capacity Magnetic Stirrer



Timing function



Knob operation



Forward and reverse




Large capacity

TECHNICAL DATA

Model	MS-5L	MS-10L	MS-15L	MS-30L	MS-50L
Control Mode	Display & Knob				
Display Method	LCD display				
Power	10W	20W	20W	30W	50W
Working Plate (mm)	180*180	220*220	220*220	260*260	330*330
Max Stirring Volume	5L	10L	15L	30L	50L
Speed Range	50-1500rpm	50-1500rpm	50-1500rpm	50-1300rpm	50-1100rpm
Speed Regulation Accuracy	5rpm	5rpm	5rpm	5rpm	5rpm
Timing Range	1min-23h59min				
Stir Bar Size (mm)	40	50	60	80	100
Product Size (mm)	280*180*65	315*220*65	315*220*65	350*260*85	435*330*85

Large Capacity Magnetic Stirrer

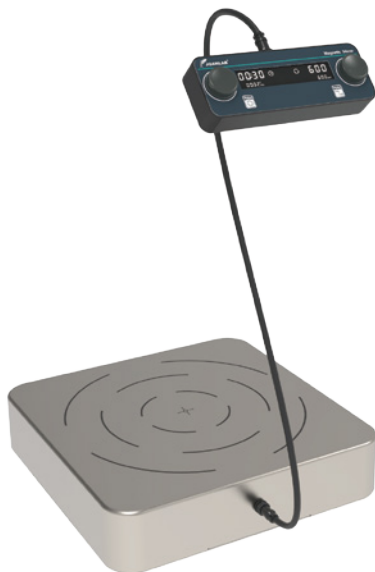

Forward and reverse



Extra large stirring capacity



Timing function



Knob operation


TECHNICAL DATA

Model	MS-100L
Control Mode	Digital display & Knob
Display Method	LCD display
Power	120W
Working Plate	400*400mm
Max Stirring Volume	100L
Speed Range	100-600rpm
Speed Regulation Accuracy	5rpm
Timing Range	1min-24h
Stir Bar Size	160mm

Multiple Magnetic Stirrer



Can be set to run synchronously or asynchronously

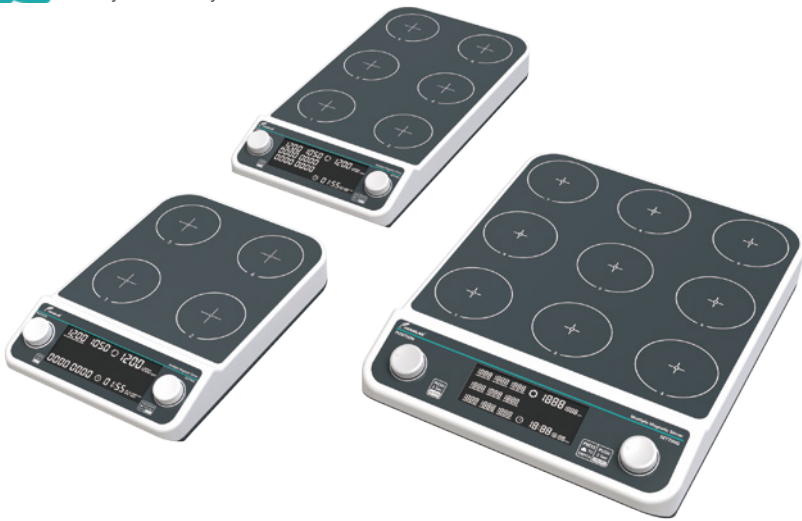

Timing function



Stepless speed regulation,
wide speed range



LCD display



Durable brushless motor

TECHNICAL DATA

Model	MMS4Pro	MMS6Pro	MMS9Pro
Control	Asynchronous control		
Number Of Stirring Points	4	6	9
Max Capacity	4*500ml	6*500ml	9*500ml
Working Plate Size	4-(110*110mm)	6-(110*110mm)	9-(110*110mm)
Motor	Brushless motor		
Speed	50-1500rpm		
Bar Size (mm)	Z30		
Timing	1min-19h59min		
Voltage	AC100-240V		

Multiple Magnetic Stirrer with Heating



Can be set to run synchronously or asynchronously



LCD display



304 stainless steel plate, corrosion resistant



Heat more uniformly



Durable brushless motor

TECHNICAL DATA

Model	MHS4Pro	MHS6Pro
Control	Asynchronous control	
Number Of Stirring Points	4	6
Max Capacity	4*500ml	6*500ml
Working Plate Size	4-(110*110mm)	6-(110*110mm)
RPM	50-1200 rpm	
Plate Material	304 Stainless steel	
Plate Temperature	120°C	
Timing	1min-19h59min	
Bar Size (mm)	Z30	Z30
Power	240W	360W
Voltage	AC 220V	

Overhead Stirrer



Smooth start



DC permanent magnet motor



Adjustable speed



Powerful

TECHNICAL DATA

Model	OS-5	OS-10	OS-15S	OS-30S
Motor	Brushed motor		Brushless motor	
Max Amount Of Stirring	5L	10L	10L	20L
Range Of Rotate Speed	200-1500rpm	100 - 1000rpm	100 - 2000rpm	50 - 1200rpm
Timing	/	/	1min-23h59min	1min-23h59min
Max Torque	10N.cm	20N.cm	15N.cm	30N.cm
Max Viscosity	5000mPas	10000mPas	8000mPas	16000mPas
Drill Chuck Diameter	1-10mm	1-10mm	1-10mm	1-10mm
Power	20W	25W	30W	36W
Voltage	AC100-240V			